


FLEXADUX® PU 2.5 ECO

Very heavy weight Polyurethane hose

- Applications** roof graveling, gravel conveying, conveying of rubble, construction machines, conveying of abrasive media
- Structure** TPU / Polyether-Polyurethane, uncolored, steel wire / spring steel wire / not coated / copper plated
- Temperature** -40°C up to 100°C, short term up to 125°C
- Properties** excellent abrasion resistance, good tensile strength, crush-resistant, very high vacuum resistance, very high pressure resistance, very smooth inside, corrugated outside, good oil & petrol resistance
- Optional**
 - flame retardant
 - permanently antistatic
 - or both in combination

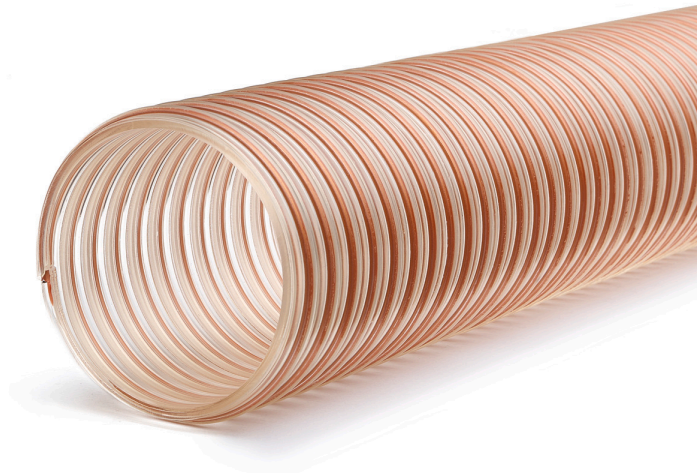

Inner Diameter (mm)	Wall Thickness (mm)	Bending Radius (mm)	Max. Working Pressure (bar)	Max. Vacuum (bar)	Weight (kg/m)	Article Number
40	2,50	100	3,30	0,95	0,71	37402040
45	2,50	113	3,10	0,95	0,80	37402045
50	2,50	125	3,02	0,95	0,89	37402050
60	2,50	150	2,70	0,95	1,18	37402060
80	2,50	200	2,08	0,95	1,57	37402080
140	2,50	350	1,44	0,90	2,59	37402140
200	2,50	500	1,09	0,65	3,74	37402200