


# FLEXADUX® PU 0.6 ECO

Light weight and highly flexible Polyurethane hose

- Applications**    extractions arms, filter systems, conveying technology,  
conveying of abrasive media, grass extraction
- Structure**        TPU / Polyether-Polyurethane, uncolored, steel wire / spring  
steel wire / not coated / copper plated
- Temperature**    -40°C up to 100°C, short term up to 125°C
- Properties**         very good flexibility, compressible, good abrasion resistance,  
hydrolysis- & microbe resistance, free of halogen & softeners
- Optional**         - flame retardant  
- permanently antistatic  
- or both in combination

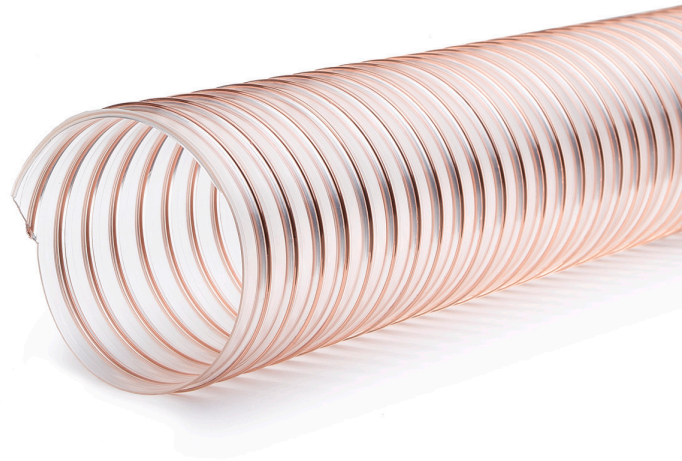

Inner Diameter (mm)	Wall Thickness (mm)	Bending Radius (mm)	Max. Working Pressure (bar)	Max. Vacuum (bar)	Weight (kg/m)	Article Number
60	0,60	36	1,10	0,25	0,41	13510060
80	0,60	48	0,80	0,18	0,54	13510080
90	0,60	54	0,70	0,16	0,61	13510090
100	0,60	60	0,60	0,15	0,66	13510100
125	0,60	75	0,31	0,12	0,66	13510125
140	0,60	84	0,22	0,12	0,91	13510140
150	0,60	90	0,17	0,10	0,97	13510150
200	0,60	120	0,12	0,09	1,38	13510200