


FLEXADUX® PU 0.7 ECO

Medium weight and flexible Polyurethane hose

- Applications** conveying of abrasive media, conveying technology, waste disposal vehicles, dosing, grass extraction
- Structure** TPU / Polyether-Polyurethane, uncolored, steel wire / spring steel wire / not coated / copper plated
- Temperature** -40°C up to 100°C, short term up to 125°C
- Properties** good flexibility, very good abrasion resistance, very smooth inside, corrugated outside, hydrolysis- & microbe resistance, free of halogen & softeners
- Optional**
- flame retardant
 - permanently antistatic
 - or both in combination

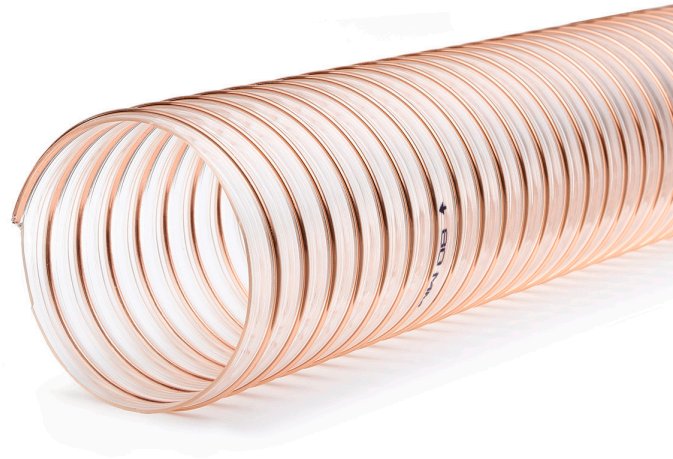

Inner Diameter (mm)	Wall Thickness (mm)	Bending Radius (mm)	Max. Working Pressure (bar)	Max. Vacuum (bar)	Weight (kg/m)	Article Number
25	0,70	18	1,50	0,50	0,22	09000025
50	0,70	35	1,18	0,27	0,39	09000050
60	0,70	42	1,18	0,27	0,46	09000060
80	0,70	56	0,86	0,21	0,61	09000080
90	0,70	63	0,70	0,20	0,68	09000090
100	0,70	70	0,64	0,19	0,76	09000100
110	0,70	77	0,60	0,17	0,83	09000110
120	0,70	84	0,54	0,16	0,89	09000120
125	0,70	88	0,50	0,15	0,93	09000125
140	0,70	98	0,43	0,11	1,04	09000140
150	0,70	105	0,41	0,11	1,11	09000150
180	0,70	126	0,32	0,11	1,60	09000180
200	0,70	140	0,27	0,10	1,77	09000200
250	0,70	175	0,21	0,06	2,21	09000250
300	0,70	210	0,16	0,06	2,65	09000300
350	0,70	245	0,11	0,05	3,32	09000350