


FLEXADUX® P 2 PP

Very light weight and highly flexible spiral hose made of Polypropylene

- Applications** extraction systems, automotive engineering, vehicle construction, air conditioning & HVAC, ventilation
- Structure** PP, black / jet black (similar RAL 9005), steel wire / spring steel wire / not coated / copper plated
- Temperature** -20°C up to 100°C
- Properties** very good flexibility, good temperature resistance, good chemical resistance, good ozone- & UV-resistance, hydrolysis- & microbe resistance, free of halogen & softeners

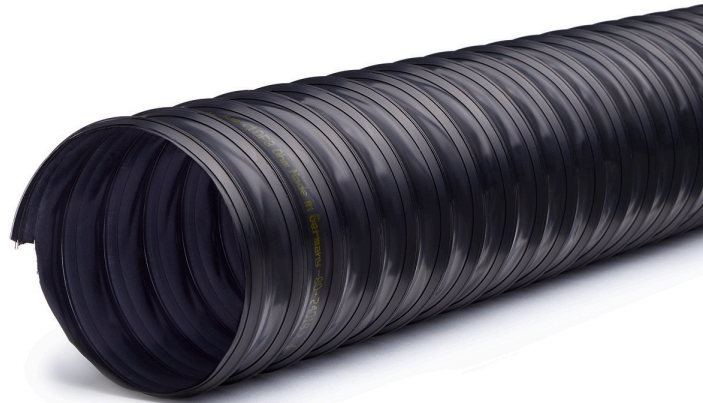

Inner Diameter (mm)	Wall Thickness (mm)	Bending Radius (mm)	Max. Working Pressure (bar)	Max. Vacuum (bar)	Weight (kg/m)	Article Number
40	0,40	28	0,40	0,18	0,18	29805040
50	0,40	35	0,35	0,15	0,22	29805050
60	0,40	42	0,35	0,14	0,26	29805060
70	0,40	49	0,30	0,12	0,30	29805070
75	0,40	50	0,30	0,11	0,32	29805075
80	0,40	56	0,25	0,09	0,34	29805080
100	0,40	70	0,20	0,08	0,42	29805100
120	0,40	85	0,20	0,07	0,50	29805120
125	0,40	88	0,15	0,06	0,52	29805125
140	0,40	95	0,10	0,06	0,58	29805140
150	0,40	105	0,08	0,05	0,63	29805150
175	0,40	123	0,06	0,04	0,73	29805175
200	0,40	140	0,05	0,03	0,88	29805200
250	0,40	175	0,04	0,03	1,10	29805250
300	0,40	210	0,03	0,02	1,31	29805300
400	0,40	285	0,02	0,01	2,03	29805400
500	0,40	355	0,01	0,01	2,53	29805500