


FLEXADUX® PU 0.4 ECO

Light weight and very flexible spiral hose made of polyurethane

- Applications** extractions arms, filter systems, grass extraction, wood dust extraction, leaf extraction
- Structure** TPU / Polyether-Polyurethane, uncolored, steel wire / spring steel wire / not coated / copper plated
- Temperature** -40°C up to 100°C, short term up to 125°C
- Properties** very good flexibility, compressible, good abrasion resistance, hydrolysis- & microbe resistance, free of halogen & softeners
- Optional**
 - flame retardant
 - permanently antistatic
 - or both in combination

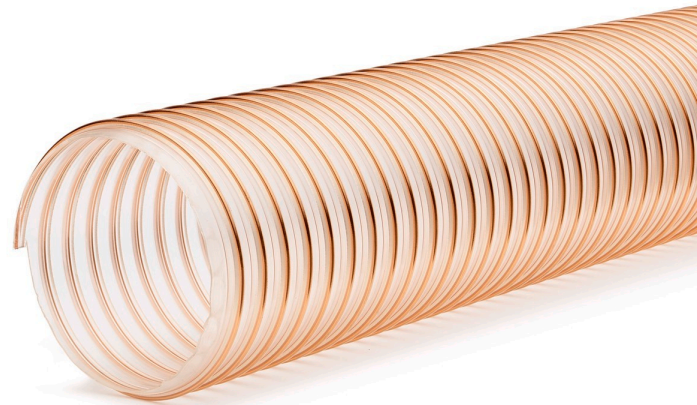

Inner Diameter (mm)	Wall Thickness (mm)	Bending Radius (mm)	Max. Working Pressure (bar)	Max. Vacuum (bar)	Weight (kg/m)	Article Number
25	0,40	15	0,65	0,30	0,14	20000025
40	0,40	24	0,50	0,25	0,21	20000040
50	0,40	30	0,40	0,20	0,25	20000050
60	0,40	36	0,40	0,16	0,30	20000060
70	0,40	42	0,35	0,13	0,35	20000070
75	0,40	45	0,30	0,12	0,37	20000075
80	0,40	48	0,28	0,10	0,39	20000080
100	0,40	60	0,20	0,09	0,47	20000100
120	0,40	72	0,20	0,08	0,56	20000120
125	0,40	75	0,18	0,07	0,58	20000125
140	0,40	84	0,15	0,06	0,65	20000140
150	0,40	90	0,10	0,06	0,69	20000150
200	0,40	120	0,08	0,05	0,99	20000200
250	0,40	150	0,05	0,04	1,23	20000250
300	0,40	180	0,03	0,03	1,46	20000300
350	0,40	210	0,02	0,02	1,96	20000350