


FLEXADUX® PU 2.0 ECO

Very heavy weight Polyurethane hose

- Applications** roof graveling, gravel conveying, conveying of rubble, construction machines, conveying of abrasive media
- Structure** TPU / Polyether-Polyurethane, uncolored, steel wire / spring steel wire / not coated / copper plated
- Temperature** -40°C up to 100°C, short term up to 125°C
- Properties** heavy-duty, good abrasion resistance, good tensile strength, crush-resistant, very high pressure resistance, very high vacuum resistance, very smooth inside, corrugated outside
- Optional**
- flame retardant
 - permanently antistatic
 - or both in combination

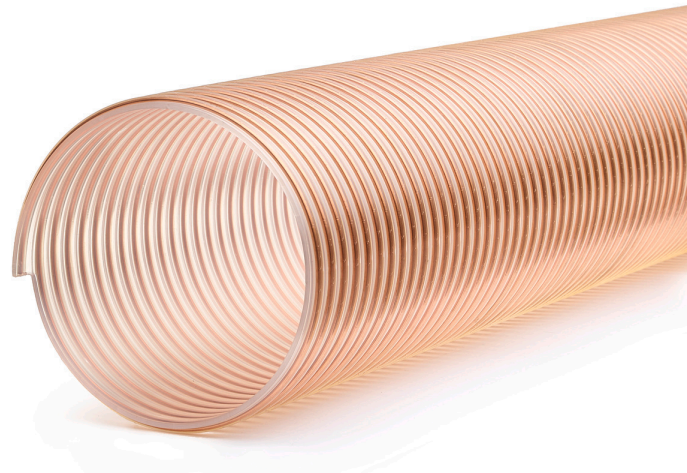

Inner Diameter (mm)	Wall Thickness (mm)	Bending Radius (mm)	Max. Working Pressure (bar)	Max. Vacuum (bar)	Weight (kg/m)	Article Number
50	2,00	125	3,19	0,95	1,03	09100050
60	2,00	150	2,80	0,95	1,23	09100060
76	2,00	230	2,14	0,95	1,54	09100076
80	2,00	200	2,09	0,95	2,02	09100080
100	2,00	280	1,90	0,95	2,51	09100100
150	2,00	800	1,35	0,75	3,96	09100150
250	2,00	1	0,63	0,40	6,56	09100250