


FLEXADUX® P 2 SP-TPR

Very light weight and highly flexible spiral hose made of TPE

- Applications** extraction systems, automotive engineering, vehicle construction, air conditioning & HVAC, ventilation
- Structure** TPE/E, black / jet black (similar RAL 9005), steel wire / spring steel wire / not coated / copper plated
- Temperature** -40°C up to 135°C, short term up to 150°C
- Properties** very good flexibility, very good temperature resistance, good compressibility, good chemical resistance, good ozone- & UV-resistance, weather proof, hydrolysis- & microbe resistance
- Optional** - antistatic ($R \leq 10^8$ Ohm)

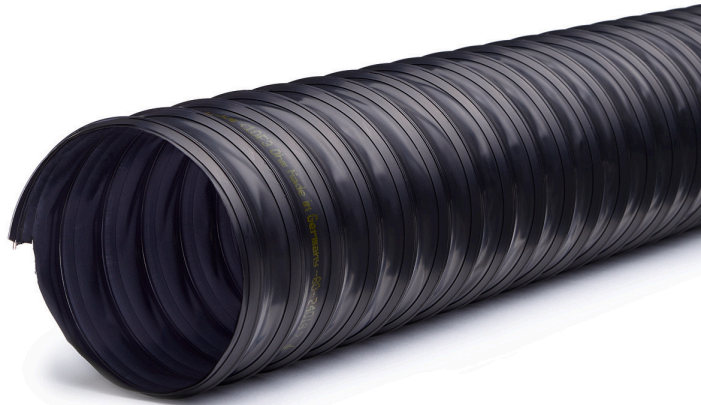

Inner Diameter (mm)	Wall Thickness (mm)	Bending Radius (mm)	Max. Working Pressure (bar)	Max. Vacuum (bar)	Weight (kg/m)	Article Number
40	0,40	28	0,34	0,15	0,18	28805040
50	0,40	35	0,27	0,12	0,22	28805050
60	0,40	42	0,22	0,10	0,26	28805060
70	0,40	49	0,20	0,08	0,30	28805070
75	0,40	50	0,18	0,08	0,32	28805075
80	0,40	56	0,17	0,07	0,34	28805080
100	0,40	70	0,14	0,06	0,42	28805100
120	0,40	85	0,12	0,06	0,50	28805120
125	0,40	88	0,11	0,05	0,52	28805125
140	0,40	95	0,10	0,05	0,58	28805140
150	0,40	105	0,08	0,04	0,63	28805150
200	0,40	140	0,05	0,03	0,88	28805200
250	0,40	175	0,04	0,02	1,10	28805250
300	0,40	210	0,03	0,02	1,31	28805300
350	0,40	250	0,02	0,01	1,78	28805350
400	0,40	285	0,02	0,01	2,03	28805400
500	0,40	355	0,01	0,01	2,53	28805500