


FLEXADUX® HT PU 0.7

Polyurethane ducting for high temperature applications

- Applications** extraction systems, extractions arms, textile fiber extraction, steam extraction, high temperature applications
- Structure** TPU / Polyester-Polyurethane, uncolored, steel wire / iron wire / not coated / copper plated
- Temperature** -40°C up to 145°C, short term up to 165°C
- Properties** light weight, very good flexibility, very good temperature resistance, very good abrasion resistance, smooth inside

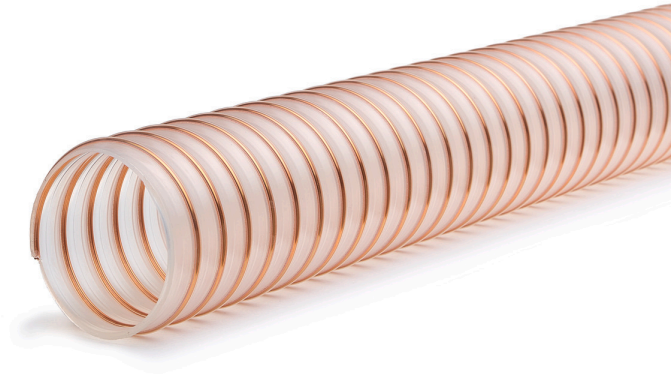

Inner Diameter (mm)	Wall Thickness (mm)	Bending Radius (mm)	Max. Working Pressure (bar)	Max. Vacuum (bar)	Weight (kg/m)	Article Number
25	0,70	25	1,50	0,43	0,22	07506025
50	0,70	50	1,07	0,27	0,39	07506050
100	0,70	100	0,64	0,19	0,76	07506100
120	0,70	120	0,54	0,16	0,89	07506120
180	0,70	180	0,32	0,08	1,60	07506180