


FLEXADUX® Aramid CL

Very light weight and highly flexible clip hose with silicone coated aramid fabric

- Applications** exhaust gas extraction, extraction systems, high temperature applications, venting, extractions arms
- Structure** coated fabrics / silicone coated aramid fabric, green / leaf green (similar RAL 6002), clip profile / with external abrasion protection profile
- Temperature** -60°C up to 260°C
- Properties** light weight, very good flexibility, very good temperature resistance, excellent axial compressibility, good mechanical strength, excellent resistance to high temperatures & fumes

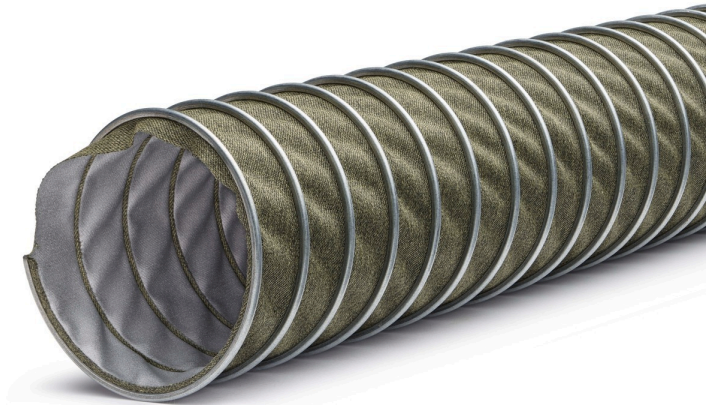

Inner Diameter (mm)	Wall Thickness (mm)	Bending Radius (mm)	Max. Working Pressure (bar)	Max. Vacuum (bar)	Weight (kg/m)	Article Number
50	0,40	30	0,90	0,32	0,61	03863050
60	0,40	36	0,78	0,22	0,53	03863060
76	0,40	45	0,62	0,14	0,67	03863076
80	0,40	48	0,61	0,12	0,71	03863080
102	0,40	60	0,51	0,08	0,68	03863102
120	0,40	72	0,36	0,05	0,80	03863120
127	0,40	75	0,33	0,05	0,85	03863127
152	0,40	90	0,22	0,04	1,02	03863152
160	0,40	96	0,21	0,03	1,07	03863160
180	0,40	126	0,17	0,02	1,21	03863180
203	0,40	140	0,15	0,02	1,12	03863203
254	0,40	175	0,10	0,01	1,40	03863254
305	0,40	210	0,07	0,01	1,68	03863305
350	0,40	245	0,06	0,01	1,93	03863350
407	0,40	320	0,04	0,01	2,81	03863407
508	0,40	400	0,04	0,01	3,51	03863508