


# FLEXADUX® HT PU 1.4

Polyurethane ducting for high temperature applications

- Applications** granulate conveying, conveying of abrasive media, high temperature applications, dosing, conveying technology
- Structure** TPU / Polyester-Polyurethane, uncolored, steel wire / spring steel wire / not coated / copper plated
- Temperature** -40°C up to 145°C, short term up to 165°C
- Properties** medium weight, good flexibility, very good low-temperature flexibility, very good temperature resistance, very good abrasion resistance

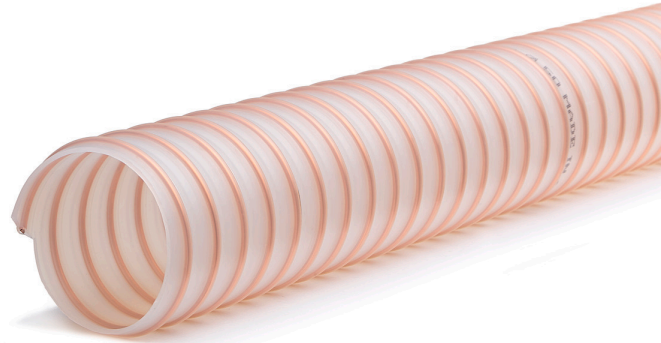

Inner Diameter (mm)	Wall Thickness (mm)	Bending Radius (mm)	Max. Working Pressure (bar)	Max. Vacuum (bar)	Weight (kg/m)	Article Number
38	1,40	70	2,90	0,90	0,47	07604038
40	1,40	70	2,80	0,90	0,49	07604040
50	1,40	90	2,80	0,90	0,64	07604050
55	1,40	100	2,65	0,90	0,70	07604055
60	1,40	110	2,50	0,80	0,77	07604060
63	1,40	120	2,40	0,80	0,80	07604063
70	1,40	130	2,10	0,70	0,89	07604070
76	1,40	140	2,00	0,60	0,96	07604076
80	1,40	150	2,00	0,60	1,01	07604080
100	1,40	185	1,60	0,50	1,49	07604100
150	1,40	285	0,90	0,30	2,43	07604150
200	1,40	375	0,70	0,20	3,37	07604200