


# FLEXADUX® P 2 LF hellgrau

Very light weight and highly flexible spiral hose made of PVC

- Applications** steam extraction, textile fiber extraction, air & cooling technology, solvent vapor extraction, dust extraction
- Structure** PVC / soft PVC, grey / silver grey (similar RAL 7001), steel wire / spring steel wire / not coated / copper plated
- Temperature** 0°C up to 70°C
- Properties** very good flexibility, good compressibility, compressible, particularly small bending radius ( $r < d$ ), good chemical resistance

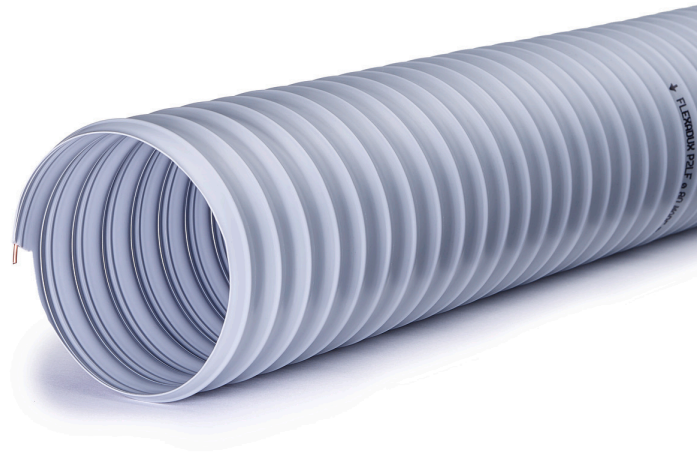

Inner Diameter (mm)	Wall Thickness (mm)	Bending Radius (mm)	Max. Working Pressure (bar)	Max. Vacuum (bar)	Weight (kg/m)	Article Number
25	0,40	18	0,45	0,22	0,14	21072025
30	0,40	21	0,40	0,20	0,17	21072030
40	0,40	28	0,40	0,18	0,21	21072040
50	0,40	35	0,35	0,15	0,26	21072050
60	0,40	42	0,35	0,14	0,31	21072060
70	0,40	49	0,30	0,12	0,36	21072070
75	0,40	53	0,30	0,10	0,38	21072075
80	0,40	56	0,25	0,09	0,41	21072080
100	0,40	70	0,20	0,08	0,48	21072100
120	0,40	85	0,20	0,07	0,57	21072120
125	0,40	88	0,15	0,06	0,59	21072125
140	0,40	95	0,10	0,06	0,66	21072140
150	0,40	105	0,08	0,05	0,71	21072150
175	0,40	123	0,06	0,04	0,82	21072175
200	0,40	140	0,05	0,03	1,02	21072200
250	0,40	175	0,04	0,03	1,26	21072250
300	0,40	210	0,03	0,02	1,51	21072300
400	0,40	280	0,02	0,01	2,30	21072400
450	0,40	315	0,01	0,01	2,58	21072450
500	0,40	350	0,01	0,01	2,86	21072500
710	0,40	475	0,01	0,01	5,51	21072710

Inner Diameter (mm)	Wall Thickness (mm)	Bending Radius (mm)	Max. Working Pressure (bar)	Max. Vacuum (bar)	Weight (kg/m)	Article Number
800	0,40	535	0,01	0,01	6,20	21072800