


FLEXADUX® P 7 ML PU AE

Medium weight and flexible spiralhose made of Polyurethane

- Applications** extraction systems, extractions arms, conveying of abrasive media, tillage, dosing
- Structure** TPU / Polyether-Polyurethane, uncolored, steel wire / spring steel wire / not coated / copper plated
- Temperature** -40°C up to 100°C, short term up to 125°C
- Properties** good flexibility, very good low-temperature flexibility, very good abrasion resistance, hydrolysis- & microbe resistance, good oil & petrol resistance
- Optional** - food-safe

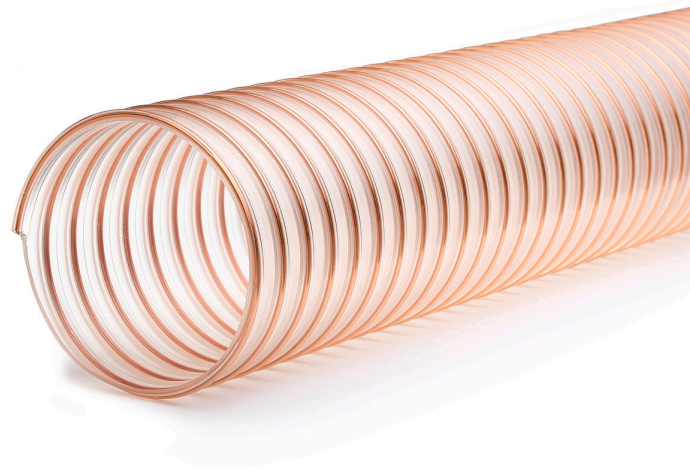

Inner Diameter (mm)	Wall Thickness (mm)	Bending Radius (mm)	Max. Working Pressure (bar)	Max. Vacuum (bar)	Weight (kg/m)	Article Number
25	1,00	21	1,96	0,55	0,24	08501025
30	1,00	26	1,96	0,55	0,25	08501030
40	1,00	34	1,69	0,45	0,34	08501040
50	1,00	43	1,32	0,40	0,42	08501050
60	1,00	51	1,27	0,35	0,50	08501060
80	1,00	68	1,05	0,25	0,74	08501080
90	1,00	77	0,85	0,25	0,83	08501090
100	1,00	85	0,70	0,23	0,92	08501100
110	1,00	94	0,65	0,20	1,01	08501110
120	1,00	102	0,65	0,20	1,03	08501120
125	1,00	106	0,55	0,20	1,07	08501125
150	1,00	128	0,45	0,15	1,28	08501150
160	1,00	136	0,40	0,15	1,36	08501160
200	1,00	170	0,30	0,11	2,02	08501200
225	1,00	191	0,25	0,09	2,28	08501225
250	1,00	213	0,25	0,08	2,53	08501250
300	1,00	255	0,20	0,07	3,03	08501300
350	1,00	298	0,18	0,06	4,07	08501350